

DESCRIPTION:LED TYPE STANDARD BLADE FUSE BLOCK
VOLTAGE:32VDC

MATERIAL:PC COVER & PBT BASE,COPPER TIN PLATED TERMINALS

INPUT TERMIANL RATING:#10-32 THREADED STUDS(100A Max.)

OUTPUT TERMINAL RATING:30A Max. PER CIRCUIT

INPUT WIRE :#4-6AWG, OUTPUT WIRE:#12-16AWG





TORQUE RATING:20 in-lb(2.25Nm) Max.

MOUNTING TORQUE RATING:8 in-lb(0.9Nm) Max.

ITEM NO	DESCRIPTION	MOUNTING HOLES		
		A +-1	B +-1	C +-1
FB1004LC	4POLES WITH COVER	85.00	47	32
FB1006LC	6POLES WITH COVER	85.00	63	48
FB1010LC	10POLES WITH COVER	85.00	95	80



MOUNTING HOLES

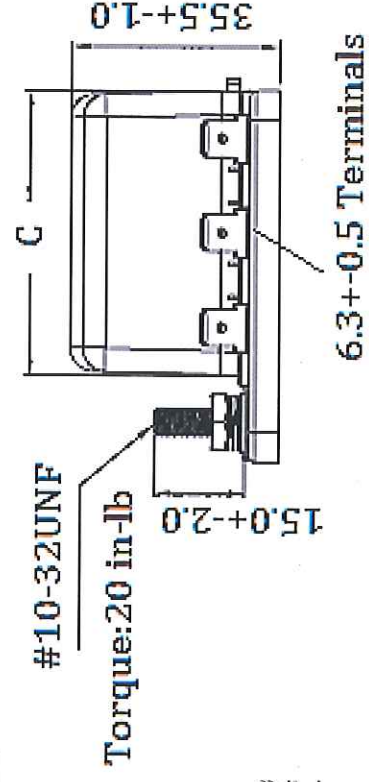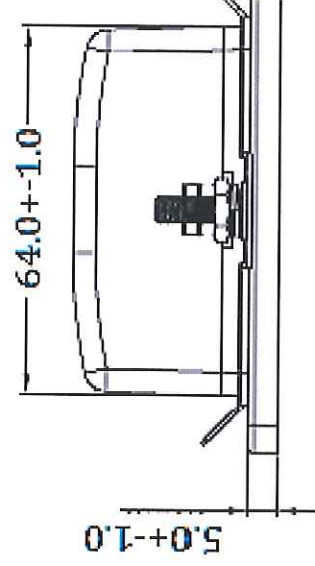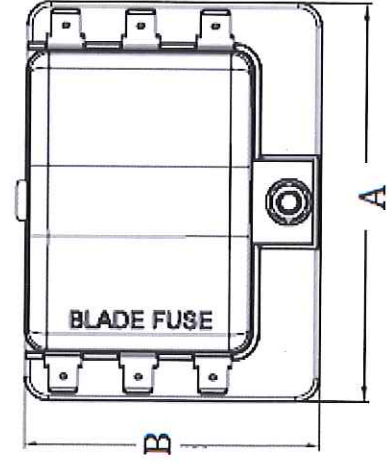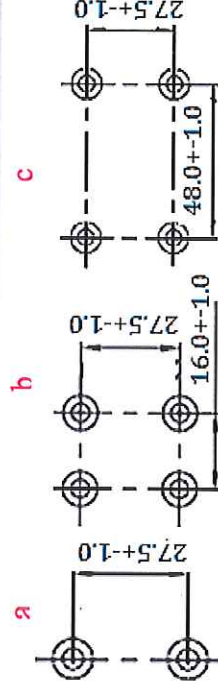

UNIT:mm

2012/6/20 AE004