


PROPRIETARY RIGHTS ARE CLAIMED FOR THE MATERIAL DISCLOSED IN THIS DRAWING.

TYP. WALL THICKNESS = 2.0

LTR.	REVISIONS	DATE
✕	*****	00-00-98

SEAL OPTIONS


SEAL THICKNESS = .8

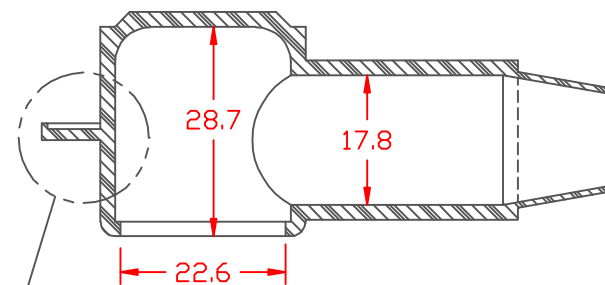

SEE VIEW "B"


SECTION A-A

SEAL NO. 3 SHOWN





NO. 1
Wire Gages
18 - 10

NO. 2
Cable Gages
8 - 2




NO. 3
Cable Gages
2 - 2/0

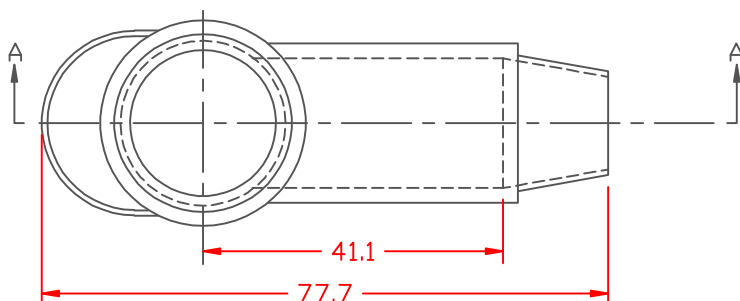


VIEW "B"
SCALE: 3" = 1"

TOLERANCE UNLESS OTHERWISE SPECIFIED: $\pm 0.030"/\pm 0.8\text{mm}$
RADIAL DIAMETERS TO BE MEASURED OVER MANDRELS,
RING GAGES OR PIN GAGES OF SUITABLE SIZE

VTE Material Part No: 1101650102
Material: RED PVC
Material Part No: 9812-65-RED683
Max. Operating Temp: 105 C
Shore Durometer: "A" 10 SEC. 67/62
Specific Gravity: 1.34
Ult. Elongation %: 475
Brittle Temp: -44 C
Tensile Strength PSI: 1547 PSI
Dielectric Strength, v./ml: 540
U.L. Rating: 94 V2
MEETS: FMVSS.302



SCALE = FULL

		VTE Incorporated 5437 Robinson Road, P.O. Box 790 Pellston, Michigan 49769 Telephone: 1-800-527-9256, 231-539-8000 FAX: 231-539-0914	
		REF:	DATE:
	3-24-98	JC	03 LBS. / 13.7 G.
TITLE: TERMINAL INSULATOR CAP			
MATERIAL:		PART NO.	
		224N3V02	
COLOR:	DRG CLASS		