

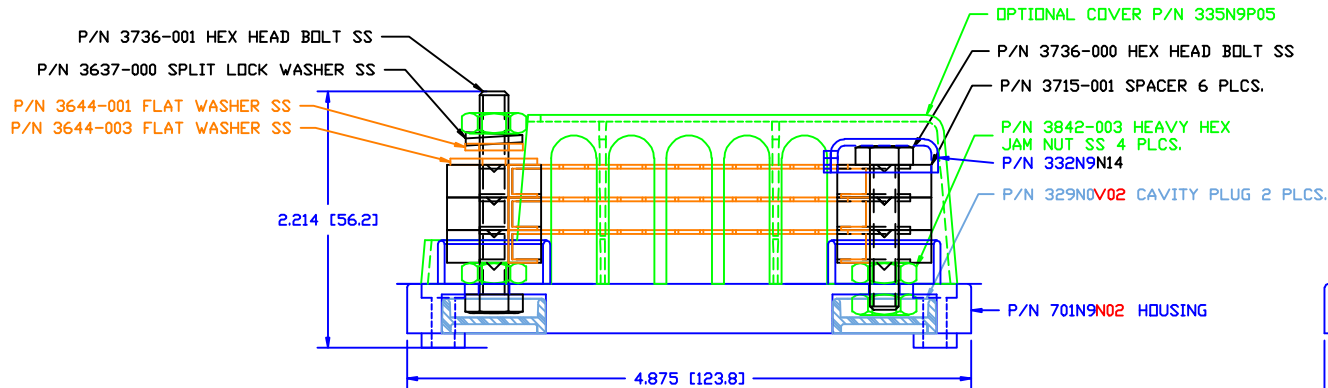


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED.

LTR.	REVISIONS	DATE
✖	*****	00-000-00

P/N 3781-010  
MODULAR CONTACT STRIP  
10 POINT  
3 REQ'D.

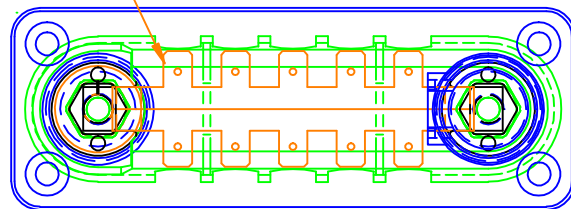

P/N TTB730N02 RED  
P/N TTB730N14 BLACK

MAXIMUM RECOMMENDED FASTENER TORQUE: 72 IN./LBS.  
8 Nm

TOLERANCE UNLESS OTHERWISE SPECIFIED:  
 MOLDED PRODUCTS ONLY: ±0.30"/±0.8mm  
 HARDWARE ITEMS: ±0.010"/±0.25mm  
 RADIAL DIAMETERS TO BE MEASURED OVER MANDRELS,  
 RING GAGES OR PIN GAGES OF SUITABLE SIZE

BASE MATERIAL:  
 BASE MATERIAL U.L. RATING:  
 VTE MATERIAL P/N:

GLASS-REINFORCED NYLON  
 94 HB  
 7111210502

**VTE Incorporated**  
 5437 Robinson Road, P.O. Box 790  
 Pellston, Michigan 49769  
 Telephone: 1-800-527-9256, 231-539-8000  
 FAX: 231-539-0914

REF: *****	DATE: 21MAY08	DRN BY: BRH CHK'D BY: BRH	WEIGHT: *****
TITLE: BUSBAR, TAB TYPE 30 POINT			SCALE:
MATERIAL:		PART NO.	
COLOR: *****	DRG CLASS *****	TTB730N02	