
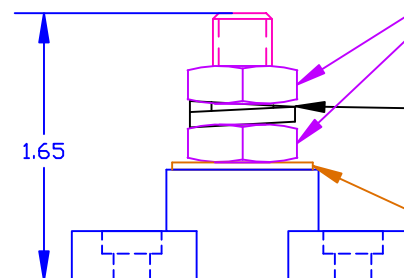



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED.

LTR.	REVISIONS	DATE
A	ADDED MATERIAL AND PERFORMANCE NOTES	22JAN04
B	REVISED PERFORMANCE NOTES	23FEB04
C	3844-002 WAS 3844	18MAY05
D	REPLACED (1)-3844-002 WITH (1)-3844	01SEP05
E	ADDED OPTIONAL CONSTRUCTION NOTE AND -000 SUFFIXES	04APR06

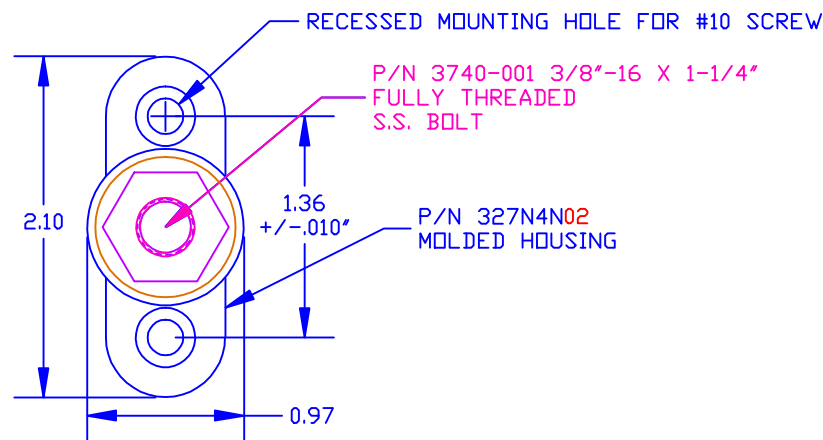

Ⓔ

DO NOT SCALE

P/N 3844-003 3/8"-16 STAINLESS STEEL HEAVY HEX JAM NUT
FACTORY ASSEMBLED TO 15 FT./LBS (180 IN./LBS)
OPTIONAL CONSTRUCTION: P/N 3844-000 3/8"-16 TIN PLATED BRASS HEAVY HEX JAM NUT
FACTORY ASSEMBLED TO 15 FT./LBS (180 IN./LBS)


P/N 3638-000 3/8" STAINLESS STEEL SPRING WASHER

P/N 3646-000 3/8" STAINLESS FLAT WASHER

OPTIONAL CONSTRUCTION NOTE:
COLOR OF BOLT CAVITY PLUG
ON BOTTOM OF ASSEMBLY MAY VARY

TOLERANCE UNLESS OTHERWISE SPECIFIED: ±.030"/±0.8mm
RADIAL DIAMETERS TO BE MEASURED OVER MANDRELS,
RING GAGES OR PIN GAGES OF SUITABLE SIZE

BASE MATERIAL: GLASS-REINFORCED NYLON
BASE MATERIAL U.L. RATING: 94 HB
DIELECTRIC STRENGTH: 630 VOLTS/MIL PER ASTM D149
VOLTAGE RATING: 48 VDC MAX.
CURRENT RATING: 250 AMPS @ 12 VDC
TEMP. RISE AT LOAD: 52 DEG. F.
RECOMMENDED MAXIMUM TORQUE: 12 FT./LBS. (144 IN./LBS.)

 VTE Incorporated 5437 Robinson Road, P.O. Box 790 Pellston, Michigan 49769 Telephone: 1-800-527-9256, 231-539-8000 FAX: 231-539-0914			
REF: ***	DATE: 09APR03	DRN BY: BRH CHK'D BY: BRH	WEIGHT: ***
TITLE: 3/8" SMALL JUNCTION POST			SCALE: NONE
MATERIAL: NOTED		PART NO.	
COLOR: RED	DRG CLASS	77037 N02	