

TECHNICAL SPECIFICATIONS

Call 01255 555200 Email info@durite.co.uk Visit www.durite.co.uk



0-731-17 · EV Type 2 5M Extension Cable · 16A Three Phase 480VAC

Durite EV Type 2, 5 Metre Extension Cable.

16A Three Phase 480VAC

IP54, UKCA, CE, RoHS Approved. IEC62196-1 2014, EC62196-2 2017




THE **TRUSTED QUALITY** BRAND FOR PROFESSIONALS



TECHNICAL SPECIFICATIONS

Туре	EVType 2 Extension Cable 5 Metres
Rated Voltage	480VAC
Rated Current	16A Max
Mechanical Life	10,000 No Load Plug in / Pull Out
Insertion / Extraction Force	<100N
Cable Length	5 Metres
Battery Types	Li lon
Ingress Protection	IP54
Material Construction	ABS, PC (Flame retardant grade UL94 V-0), Conductor: copper alloy, nickle plated surface.
Weight	3.3Kg
Dimensions	Please see below
Operating Temperature	-30°C to +50°C
Certificate	UKCA, CE, RoHS

TECHNICAL DRAWING

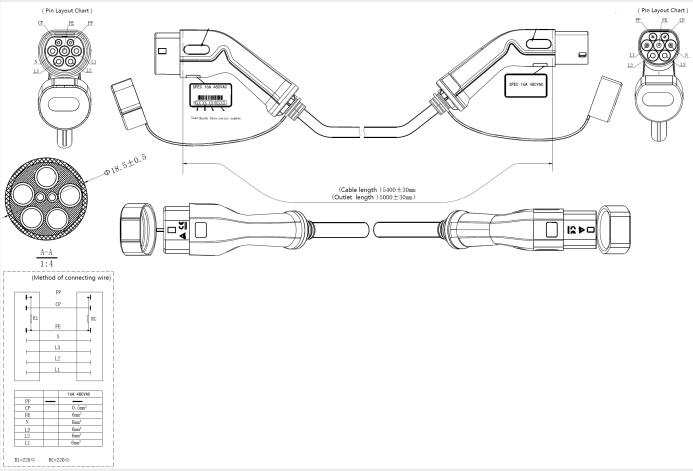

The information contained in this document is correct to the best of our knowledge and subject to change at any time without notice.